

2-way cartridge valve,
actively controllable

Type LC2A

RE 21040

Edition: 2016-12

Replaces: 2013-06



H7697+7694

- ▶ Size 16 ... 125
- ▶ Component series 1X
- ▶ Maximum operating pressure 420 bar
- ▶ Maximum flow 17000 l/min ($\Delta p = 10$ bar)

Features

- ▶ Actively controllable 2/2 directional cartridge valve ("two-level active logics")
- ▶ Modular design, flexible circuit set-up
- ▶ Installation bore according to ISO 7368
- ▶ Energy efficiency due to flow-optimized geometry
- ▶ Leakage-free due to integrated shaft sealing
- ▶ Spool position monitoring "closed" and/or "open" or analog (can also be retrofitted)
- ▶ BG certification
- ▶ Increased operating pressure 450 bar, upon request

Contents

Features	1
Ordering code	2 ... 4
Symbols	4
Assignment of the "active area"	5
Orifice assignments	5
Function, section	6
Technical data	7, 8
Characteristic curves	9 ... 14
Characteristic curves for selecting the orifices	15
Dimensions	16 ... 21
Installation bore and connection dimensions	22, 23
Circuit examples	24 ... 28
Inductive position switch	29, 30
Switching point behavior and overlap	31
Mating connectors for inductive position switch	31
Further information	32

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
LC	2A					-	1X	/														*

01	Logic Cartridge	LC
02	2-level, active	2A
03	Size 16	016
	Size 25	025
	Size 32	032
	Size 40	040
	Size 50	050
	Size 63	063
	Size 80	080
	Size 100	100
	Size 125 (only version "F", valve poppet with overlap)	125

Control spool design (area ratio see section on page 6)

04	$A_1 : A_2 = 2 : 1$ ($A_2 = 50\%$)	A
	$A_1 : A_2 = 14.3 : 1$ ($A_2 = 7\%$) (preferred with version "F", valve poppet with overlap)	B
	$A_1 : A_2 = 1 : 0$ ($A_2 = 0\%$)	D
05	Without spring	00
	With spring, cracking pressure approx. 4 bar (referring to control spool design "A")	40
06	Valve poppet without damping nose	E
	Valve poppet with damping nose	D
	Valve poppet with overlap (preferred with version with spool position monitoring)	F
07	Component series 10 ... 19 (10 ... 19: unchanged installation and connection dimensions)	1X

Active area ¹⁾ connected to port (see also page 5):

08	Z1	Z1
	Z2	Z2
	Z1 and Z2	U
	X	X
	Y	Y

Spool position monitoring ²⁾ (position switch 1 = "1"; position switch 2 = "2")

09	- Position monitoring "closed"	
	Without position switch ("1" on side "Y" – can be retrofitted)	no code
	With 1 position switch ("1" on side "Y" – mounted)	Q7
	With 2 position switches "1" on side "Y" – mounted, attachment side of "2" NG-dependent – mounted)	Q7Q7
	With 1 position switch and 2nd installation bore ("1" on side "Y" – not fitted, attachment side of "2" NG-dependent – mounted)	Q.Q7
	Without position switch, with 2 installation bores ("1" on side "Y" – not fitted, attachment side of "2" NG-dependent – not fitted)	Q.Q.
	- Combined position monitoring "1" (closed) and "2" (open) ³⁾	
	With 2 position switches "1" on side "Y" – mounted, attachment side of "2" NG-dependent – mounted)	Q7Q7T
	Without position switch, with 2 installation bores ("1" on side "Y" – not fitted, attachment side of "2" NG-dependent – not fitted)	Q.Q.T
	With 1 position switch and 2nd installation bore ("1" on side "Y" – not fitted, attachment side of "2" NG-dependent – mounted)	Q.Q7T
	- Position monitoring "closed"; NAMUR ⁴⁾	
	With 1 position switch ("1" on side "Y" – mounted)	Q8
	- Analog, position sensing	
	Analog sensor, voltage output (1 ... 10 V)	Q9
	Combination "analog" and "digital" upon request	

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
LC	2A					-	1X	/														*

Electrical connection for position switch ⁵⁾

10	Without position switch	no code
	U _B = 24 V DC (standard; only with version "Q7" and "Q9")	G24
	U _B = 8 V DC (NAMUR; only with version "Q8")	G08

Pilot oil bore in the control spool ⁶⁾

11	Without pilot oil bore	no code
	- Pilot oil bore A → spring chamber (only NG25 to 100)	
	NG25 – Maximum pilot oil bore Ø 10.0 mm	A100
	NG32 – Maximum pilot oil bore Ø 13.0 mm	A130
	NG40 – Maximum pilot oil bore Ø 16.0 mm	A160
	NG50 – Maximum pilot oil bore Ø 20.0 mm	A200
	NG63 – Maximum pilot oil bore Ø 26.0 mm	A260
	NG80 – Maximum pilot oil bore Ø 32.0 mm	A320
	NG100 – Maximum pilot oil bore Ø 40.0 mm	A400
12	Without orifice	no code
	With orifice in channel X – ①	X**
13	Without orifice	no code
	With orifice in channel F – to the active area	F**
14	Without orifice	no code
	With orifice in channel Z1 – ② (not with version "X" and "Y")	D**
15	Without orifice	no code
	With orifice in channel Z1 – ①	Z**
16	Without orifice	no code
	With orifice in channel Y – ①	Y**
17	Without orifice	no code
	With orifice in channel Z2 – ② (not with version "X" and "Y")	S**
18	Without orifice	no code
	With orifice in channel Z2 – ①	W**
19	Without orifice	no code
	With orifice in channel X – ② (not with version "Z1", "Z2" and "U")	H**
20	Without orifice	no code
	With orifice in channel X – ② (not with version "Z1", "Z2" and "U")	L**

Orifice fitting (order example see page 4)

Corrosion resistance

21	None	no code
	Improved corrosion protection (240 h salt spray test according to EN ISO 9227)	J3

Seal material ⁷⁾

22	FKM seals (other seals upon request)	F
23	For further information, see the plain text	

① = component side

② = plate side

Footnotes see page 4

Ordering code

- 1) Due to the construction, the active area (A_4) can always only be combined with one of the two pilot oil pairs "Z1/Z2" or "X/Y". Any subsequent change from "Z1/Z2" to "X/Y" is only possible with NG125.
- 2) BG certificate, see page 29
- 3) Not for NG16, 25 and 32
- 4) Only with version "G08". Evaluation electronics designed and approved of for NAMUR interfaces are standard.
- 5) Mating connectors, separate order, see page 31.
- 6) Only with type LC2A . D40E-1X/... for "check valve function"; the maximum pilot oil bore $\varnothing$ has been determined according to the size.
- 7) The selection of the seal material depends on the operating parameters (fluid, temperature, etc.)




Order example orifice fitting:


- ** = specification in mm x 10
e.g. Orifice $\varnothing 1.2$ mm in channel X – ① = "X12"
- "99" = blanking plug
e.g. Blanking plug in channel Z2 – ① = "W99"

Symbols (① = component side, ② = plate side)


Examples of control spool forms and circuitries of the active area

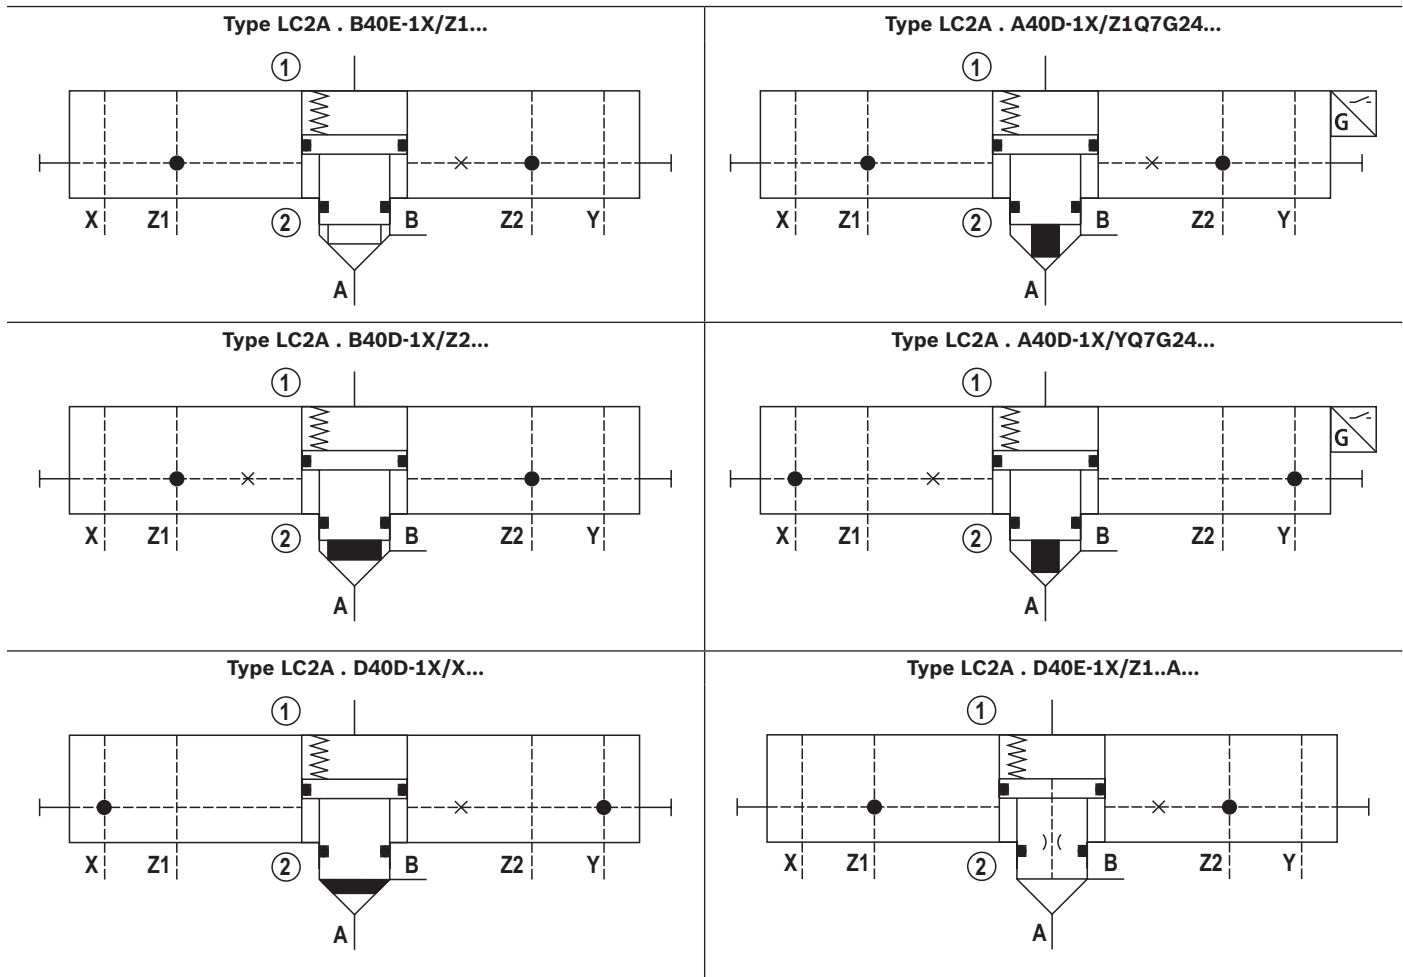

Assignment of the "active area" A₄ (① = component side, ② = plate side)

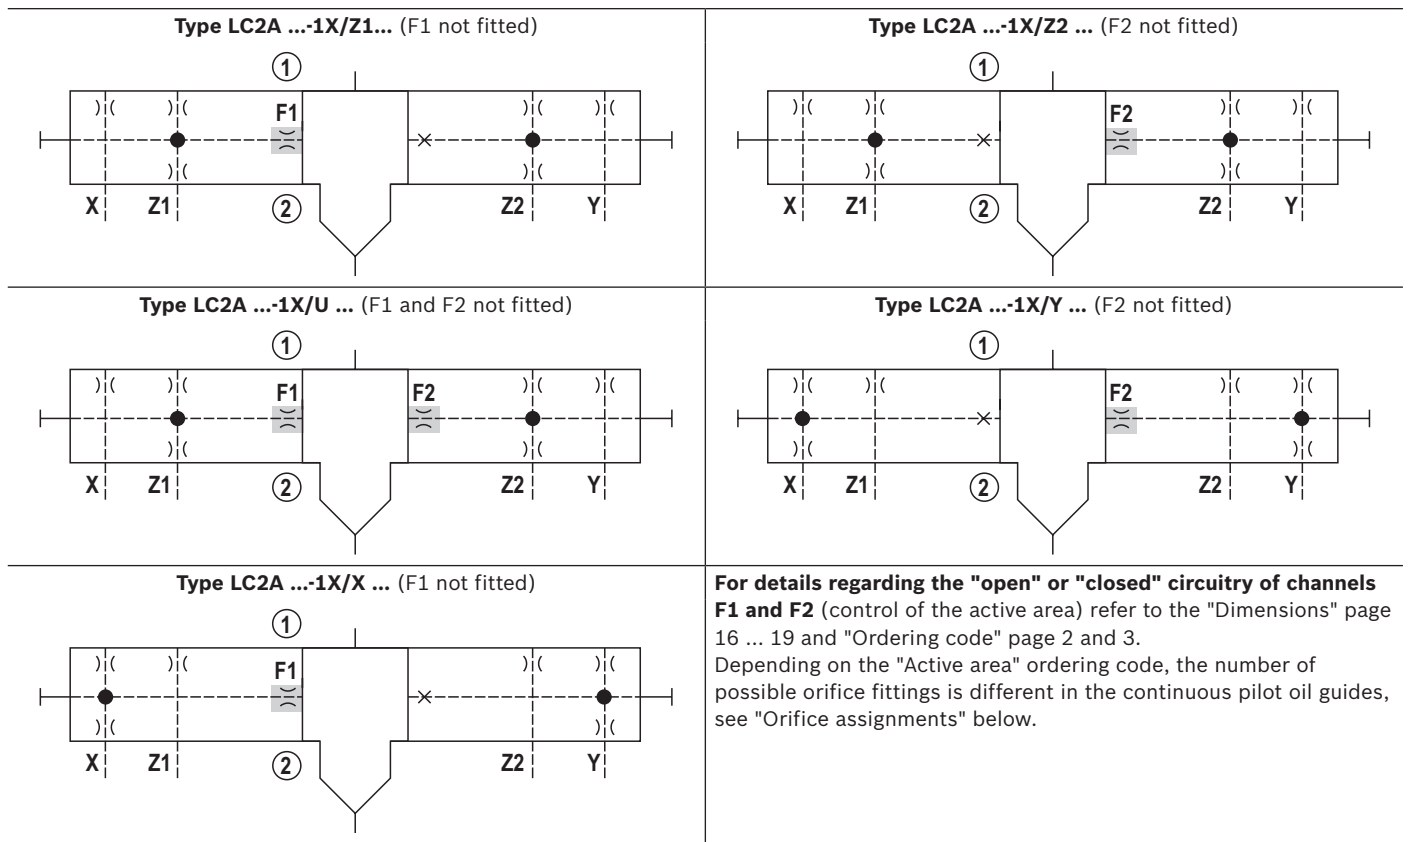

Orifice assignment (① = component side, ② = plate side)

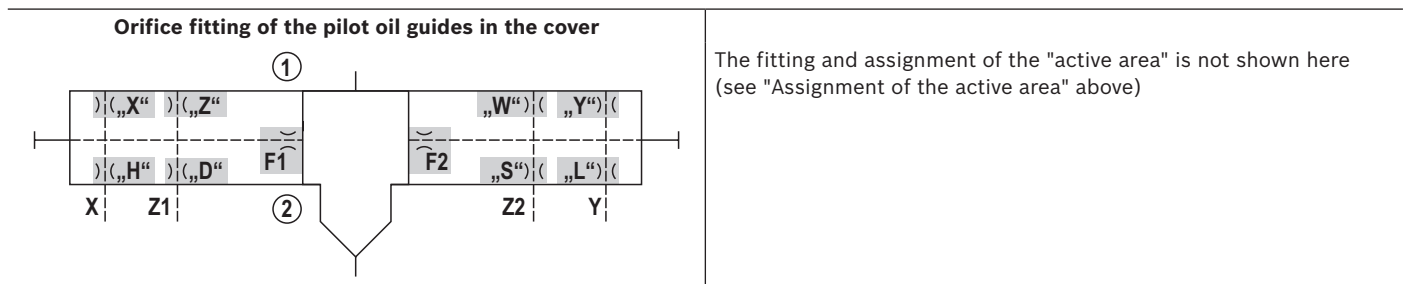

For details on the dimensions of the orifice installation bores "X" to "L", see "Dimensions" page 16 ... 19.

On the component side, the orifice installation bores are always completely available; on the plate side, only the combinations of versions "H" and "L" or "D" and "S" are possible, see "Ordering code" page 2 and 3.



Notice:

With control channels that are not required, you must either use a blanking plug ".99" or the corresponding cover.


Function, section

General

The 2-way cartridge valves type LC2A (hereinafter referred to as "active logics" (2)) are designed in compact modular design and basically consist of cartridge (control spool (3) and socket (4)), intermediate cover (5) as fixed functional unit and a control cover type LFA (1) that is part of the Rexroth standard logics program. This control cover (separate order, see data sheet 21010 or 21050) establishes the connection with the pilot control valves and/or other hydraulic elements and thus integrates the most different functions - irrespective of the basic assembly. Virtually all standard and special control covers type LFA can be mounted.

Optionally, the active logics (2) is available with position switch (6). By default, the "closed" position of the control spool (3) is recorded. The receiving hole for the position switch is provided as a standard. This means that the position switch "Q7" can be retrofitted at any time without requiring adjustments.

In contrast to the logic assemblies with only one control area in the spring chamber ("passive logics"), the name "active logics" significantly stands for a version with differential spool, with at least one additional control area A_4 ("two-level active logics"). This area allows for the opening and keeping open of the active logics (2) by means of pilot pressure (without the necessity of pressure in the main ports A or B).

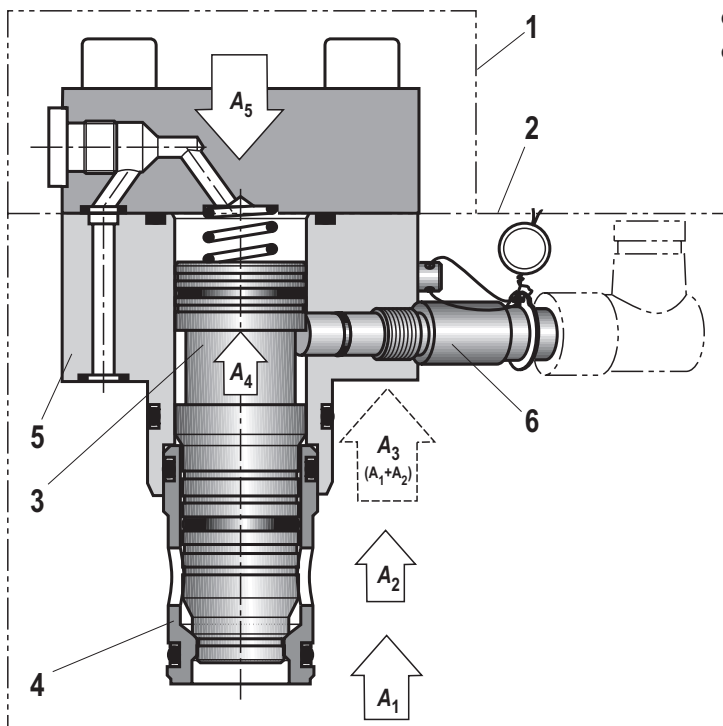

Type LC2A 025 ...-1X/.Q7G24... (with control cover type LFA . D... and monitoring of the closed position of the valve poppet)

The spring chamber area A_5 of the control spool (3) consists of the individual areas $A_1 + A_2 + A_4$. Compared to passive logics without control area A_4 , this results in excess area which, with suitable hydraulic circuitry, offers advantages during closing and keeping closed (excessive force, closing velocity).

In general

$$\text{Area total } A_5 = A_1 + A_2 + A_4 = A_3 + A_4$$

The areas A_1 , A_2 and A_4 are effective in the opening direction, area A_5 (and the spring force) in closing direction. So the resulting effective force determines the position and movement of the control spool (3). Usually, there are no interim positions in the directional function variants. The direction of flow is free and can thus be perfectly adjusted to the application.


Active logics type LC2A are generally equipped with spool sealing and are therefore leakage-free inside. The seat area is hydraulically "tight".

Active logics for directional function

Depending on the task, different control spool versions are possible. The active area can be connected with the available pilot oil guides in almost any way and in this way, most different functions can be realized with only 1 basic assembly.

Installation bore

The active logics type LC2A can be directly installed in a standard installation bore according to ISO 7368 (see page 22). Thus, it is also suitable as retrofitting for existing "passive logics" that must be leakage-free inside or require position monitoring or faster closing times.

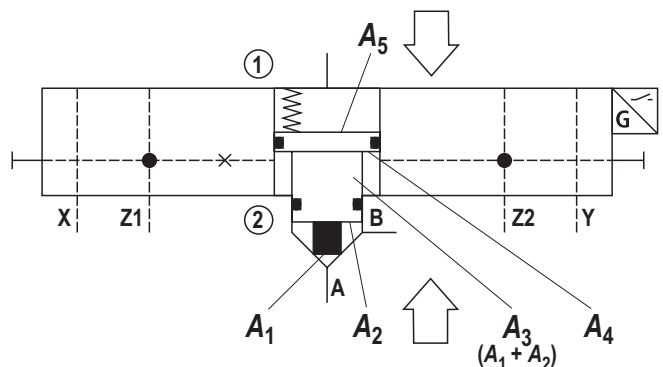

Technical data

(For applications outside these parameters, please consult us!)

general					
Ambient temperature range	°C	−20 ... +80			
MTTFd values according to EN ISO 13849	years	150 (for further details see data sheet 08012)			
hydraulic					
Maximum operating pressure	bar	420 (450 bar upon request)			
Maximum flow	l/min	17000			
Hydraulic fluid		See table below			
Hydraulic fluid temperature range (at the valve working ports)	°C	−20 ... +80			
Viscosity range	mm²/s	2.8 ... 500			
Maximum admissible degree of contamination of the hydraulic fluid cleanliness class according to ISO 4406 (c)		Class 20/18/15 ¹⁾			
Hydraulic fluid	Classification	Suitable sealing materials	Standards	Data sheet	
Mineral oils	HL, HLP	NBR, FKM	DIN 51524	90220	
Bio-degradable	► Insoluble in water	HETG	FKM	ISO 15380	90221
		HEES	FKM		
	► Soluble in water	HEPG	FKM	ISO 15380	
Flame-resistant	► Water-free	HFDU (glycol base)	FKM	ISO 12922	90222
		HFDU (ester base)	FKM		
		HFDR	FKM		
	► Containing water	HFC (Fuchs Hydrotherm 46M, Petrofer Ultra Safe 620)	NBR	ISO 12922	90223



Important information on hydraulic fluids:

- For further information and data on the use of other hydraulic fluids, please refer to the data sheets above or contact us.
- There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.).

► Flame-resistant – containing water:

- Life cycle as compared to operation with mineral oil HL, HLP 30 ... 100%
- Maximum hydraulic fluid temperature 60 °C

- **Bio-degradable and flame-resistant:** If this hydraulic fluid is used, small amounts of dissolved zinc may get into the hydraulic system.

¹⁾ The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and simultaneously increases the life cycle of the components.

For the selection of the filters, see www.boschrexroth.com/filter.

Technical data

(For applications outside these parameters, please consult us!)

Size of the annulus area

Area in cm ²	Type	Size								
		16	25	32	40	50	63	80	100	125
A₁	LC2A . A...	1.89	4.26	6.79	11.1	19.63	30.2	37.9	63.6	–
	LC2A . B...	2.66	5.73	9.51	15.55	26.42	41.28	52.8	89.1	133.7
	LC2A . D...	2.84	6.16	10.18	16.62	28.27	44.2	56.74	95.0	–
A₂	LC2A . A...	0.95	1.89	3.39	5.52	8.64	14.0	18.84	31.4	–
	LC2A . B...	0.18	0.43	0.67	1.07	1.85	2.90	3.94	5.9	9.3
	LC2A . D...	–	–	–	–	–	–	–	–	–
A₃	LC2A . A/B/D...	2.84	6.16	10.18	16.62	28.27	44.2	56.74	95.0	143
A₄		0.62	1.39	2.39	3.81	5.94	8.75	11.2	19.1	22.0
A₅		3.46	7.55	12.6	20.4	34.2	52.8	67.9	114.0	165
Area ratio A₅ : A₄ ²⁾		5.58	5.43	5.27	5.35	5.76	6.03	6.06	5.97	7.5

- ²⁾ When determining the orifice diameters for influencing the switching time, please observe the area ratio **A₅ : A₄** (inflowing and outflowing hydraulic fluid in the control chambers **A₅** and **A₄**)
In case of non-compliance pressure intensification possible!

Control spool form




		Type	Size								
			16	25	32	40	50	63	80	100	125
Stroke	cm	LC2A . ..E...	0.9	1.17	1.4	1.7	2.1	2.3	2.4	3.0	–
		LC2A . ..D...	0.9	1.17	1.4	1.9	2.3	2.8	3.0	3.8	4.8
		LC2A . ..F...	0.9	1.17	1.4	1.9	2.3	2.8	3.0	3.8	4.8
Pilot volume	cm ³	LC2A . ..E...	3.1	8.8	17.6	34.7	71.8	121.4	163.0	339.0	–
		LC2A . ..D...	3.1	8.8	17.6	38.8	78.7	147.8	203.7	429.4	792
		LC2A . ..F...	3.1	8.8	17.6	38.8	78.7	147.8	203.7	429.4	792
Theoretical pilot flow ³⁾	l/min	LC2A . ..E...	3.7	10.6	21.1	41.6	86.6	145.7	195.6	406.8	–
		LC2A . ..D...	3.7	10.6	21.1	46.6	94.4	177.4	244.4	515.3	950.4
		LC2A . ..F...	3.7	10.6	21.1	46.6	94.4	177.4	244.4	515.3	950.4
Weight	kg	LC2A ...	2.2	2.6	3.9	10.3	16.5	30.5	52.5	92.0	167

Cracking pressure in bar

Direction of flow A to B ⁴⁾	LC2A . A...	3.50	3.90	3.80	4.0	4.11	3.8	3.13	3.04	–
	LC2A . B...	2.48	2.90	2.70	2.86	3.05	2.8	2.25	2.17	1.45
Direction of flow B to A ⁴⁾	LC2A . A...	6.96	8.74	7.6	8.05	9.34	8.15	6.3	6.2	–
	LC2A . B...	36.6	38.3	38.6	41.5	43.6	39.4	30.2	32.5	20.7
Control open with active area	Version "40"	>30								
	Without spring	>12								

- ³⁾ Quantity indications refer to a theoretical switching time of **t** = 50 ms (control chamber **A₅**)
⁴⁾ With direction of flow B → A, the control spool version "D" ("0%") has no immediately effective control open area (**A₂** = 0). For this direction of flow, the active area is to be controlled. We recommend a minimum pressure of 30 bar. The cracking pressure of the control spool version "D" almost corresponds to version "B" (A → B)

Characteristic curves: without damping nose "E", A → B
(simulated with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

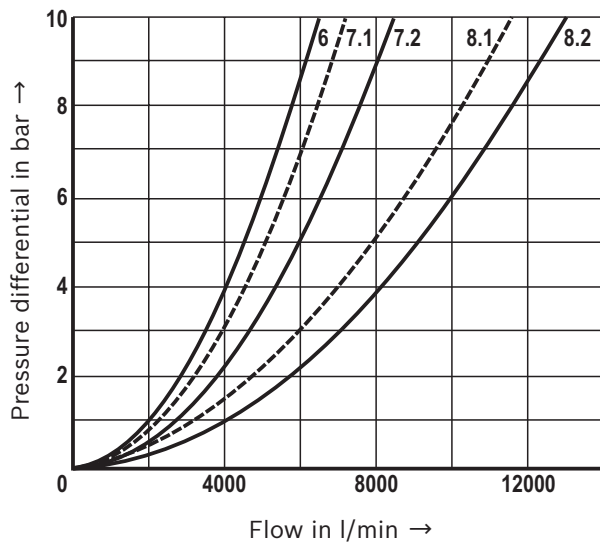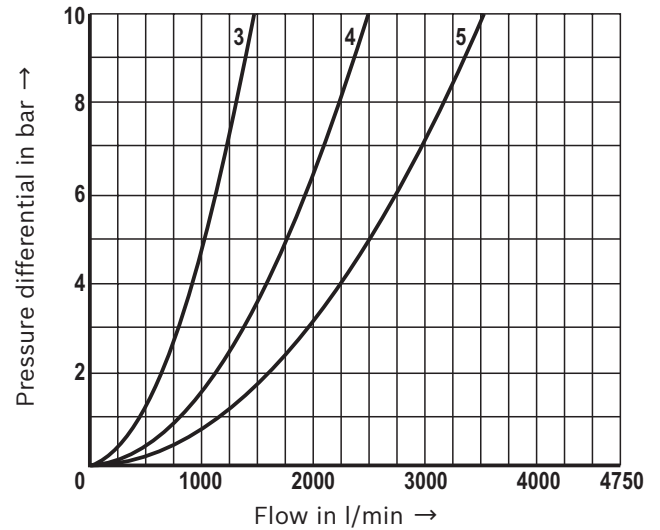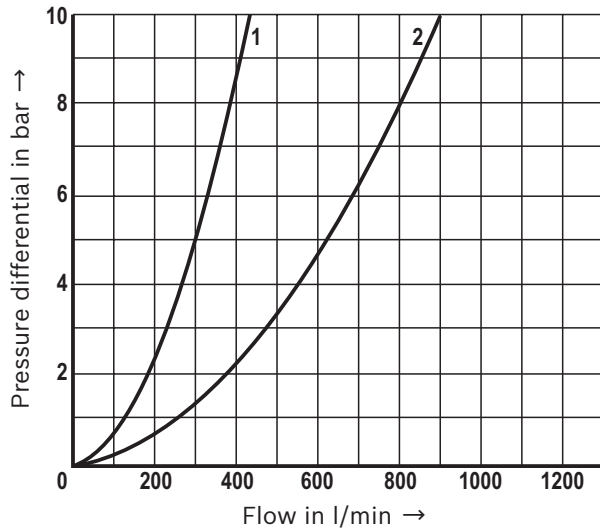


- 1 Size 16
- 2 Size 25
- 3 Size 32
- 4 Size 40
- 5 Size 50
- 6 Size 63
- 7.1 Size 80, control spool design "A"
- 7.2 Size 80, control spool design "B" and "D"
- 8.1 Size 100, control spool design "A"
- 8.2 Size 100, control spool design "B" and "D"

Notice:

The specified characteristic curves were determined without inserted springs, with aligned socket and in channel B with installation geometry optimized according to DIN ISO 7368 (see sketch on the right).


Recommended socket alignment:

NG16 ... 32






Bore on bore

NG40 ... 125



Bar on bore

Characteristic curves: without damping nose "E", B → A
(simulated with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

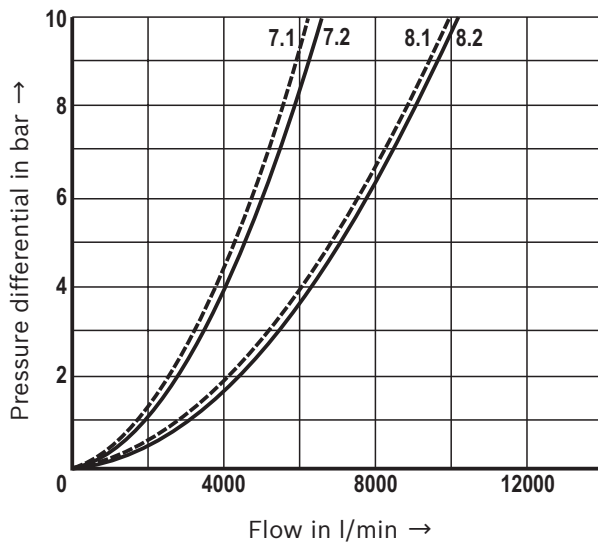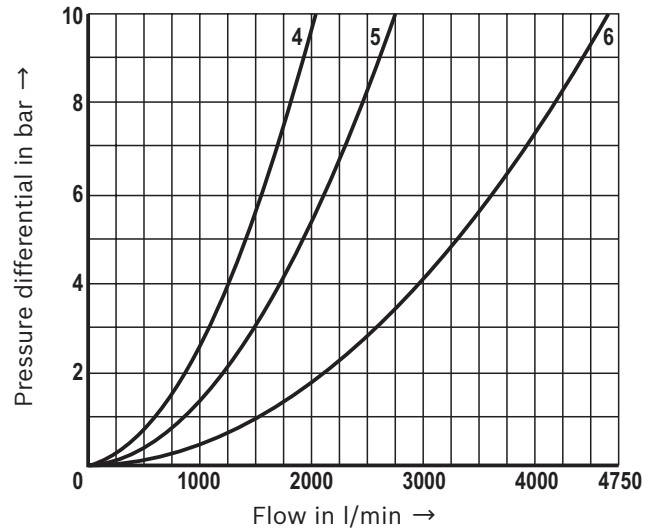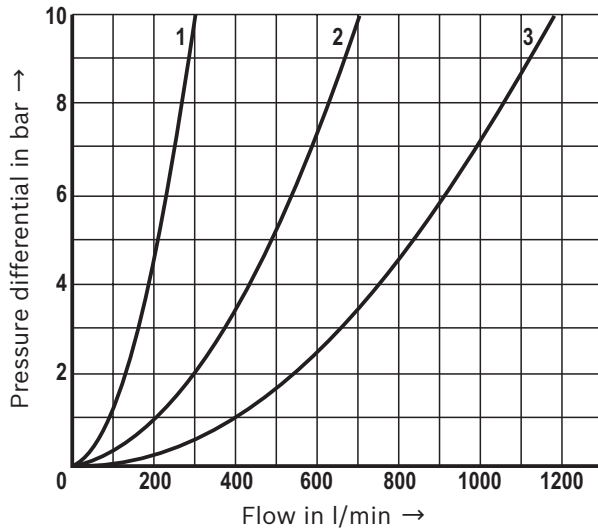




- 1 Size 16
- 2 Size 25
- 3 Size 32
- 4 Size 40
- 5 Size 50
- 6 Size 63
- 7.1 Size 80, control spool design "A"
- 7.2 Size 80, control spool design "B" and "D"
- 8.1 Size 100, control spool design "A"
- 8.2 Size 100, control spool design "B" and "D"



Notice:

The specified characteristic curves were determined without inserted springs, with aligned socket and in channel B with installation geometry optimized according to DIN ISO 7368 (see sketch on page 9).

Characteristic curves: with damping nose "D", A → B
(simulated with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ °C}$)

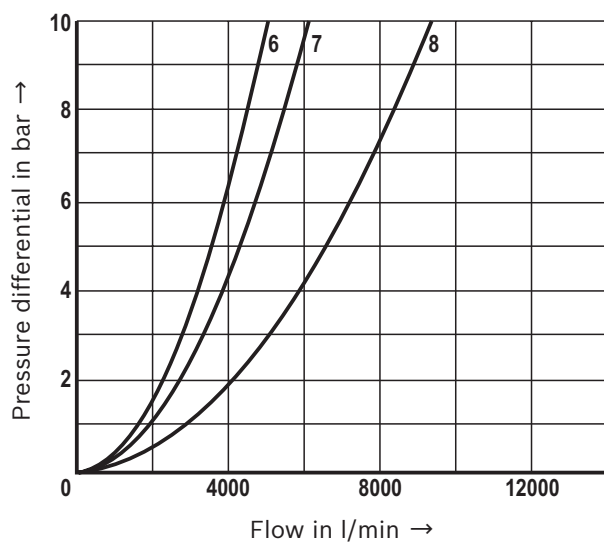
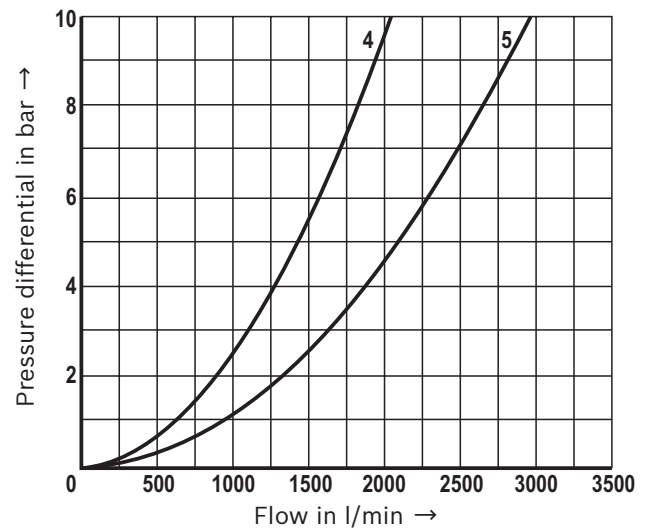
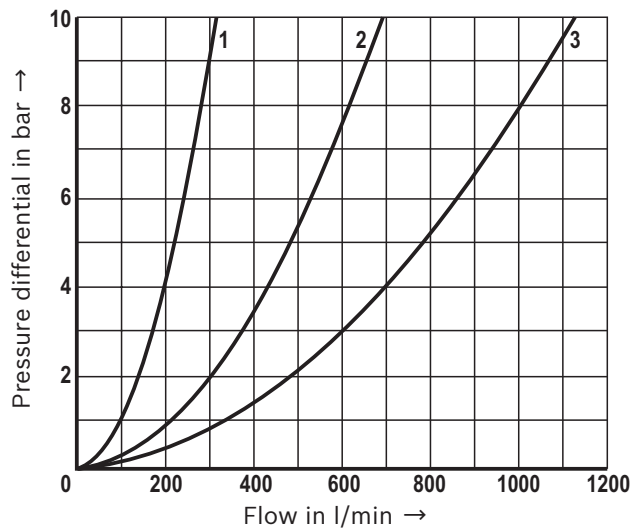


- 1 Size 16
- 2 Size 25
- 3 Size 32
- 4 Size 40
- 5 Size 50
- 6 Size 63
- 7 Size 80
- 8 Size 100

Notice:

The specified characteristic curves were determined without inserted springs, with aligned socket and in channel B with installation geometry optimized according to DIN ISO 7368 (see sketch on page 9).

Characteristic curves: with damping nose "D", B → A
(simulated with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

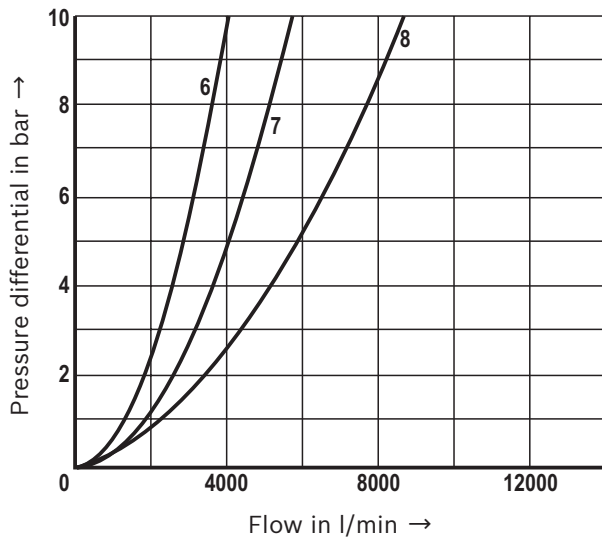
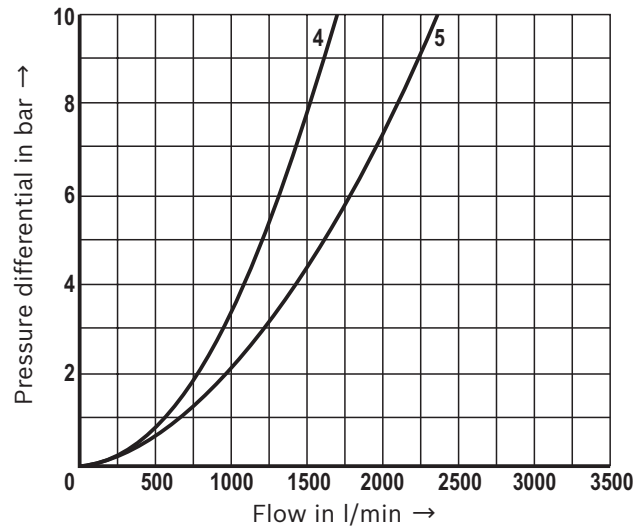
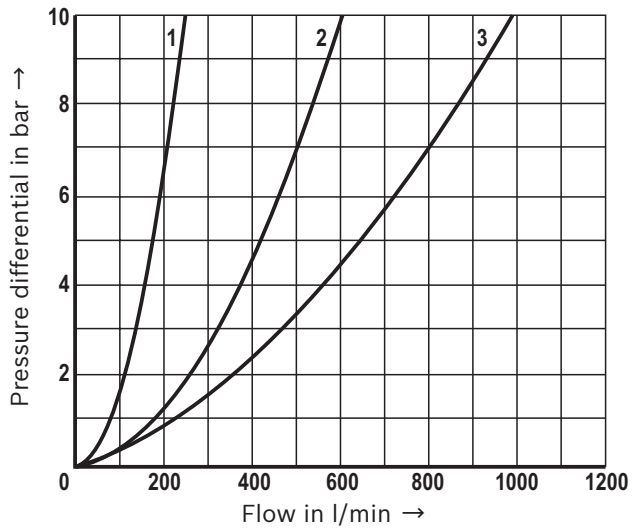


- 1 Size 16
- 2 Size 25
- 3 Size 32
- 4 Size 40
- 5 Size 50
- 6 Size 63
- 7 Size 80
- 8 Size 100

Notice:

The specified characteristic curves were determined without inserted springs, with aligned socket and in channel B with installation geometry optimized according to DIN ISO 7368 (see sketch on page 9).

Characteristic curves: with overlap "F", A → B
(simulated with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

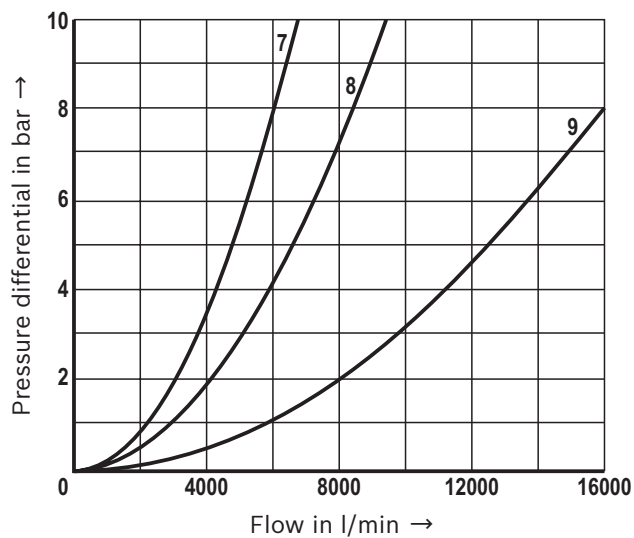
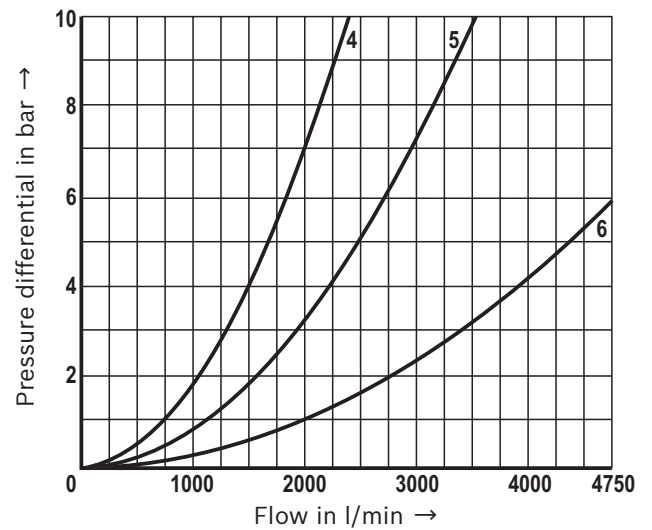
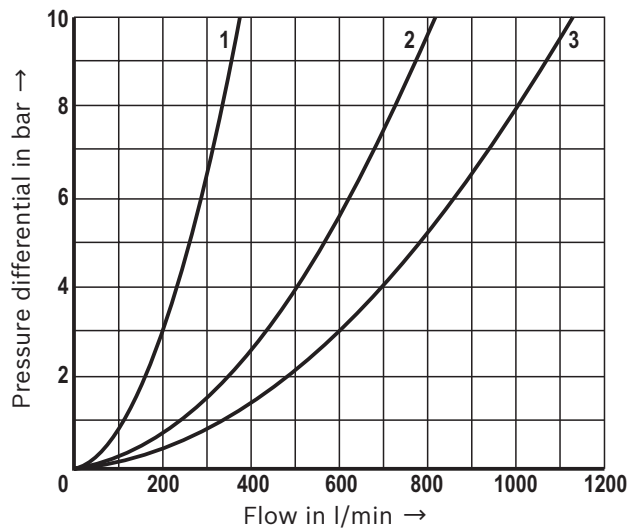


- 1 Size 16
- 2 Size 25
- 3 Size 32
- 4 Size 40
- 5 Size 50
- 6 Size 63
- 7 Size 80
- 8 Size 100
- 9 Size 125

Notice:

The specified characteristic curves were determined without inserted springs, with aligned socket and in channel B with installation geometry optimized according to DIN ISO 7368 (see sketch on page 9).

Characteristic curves: with overlap "F", B → A
(simulated with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

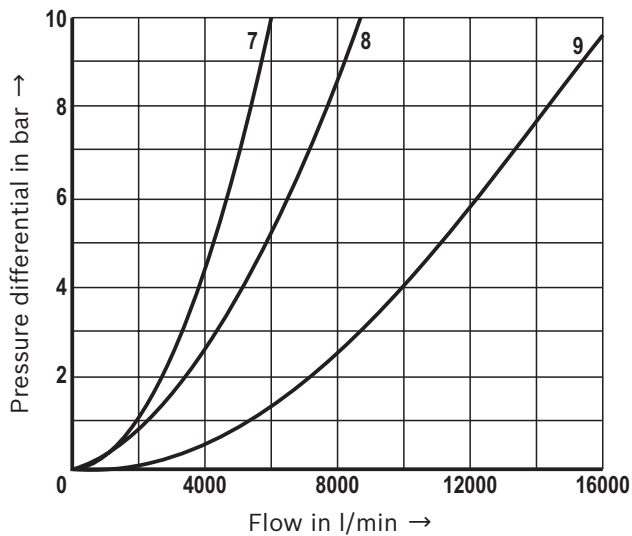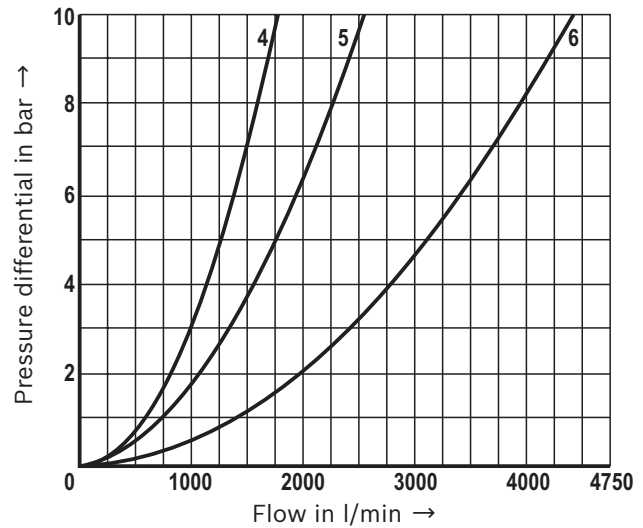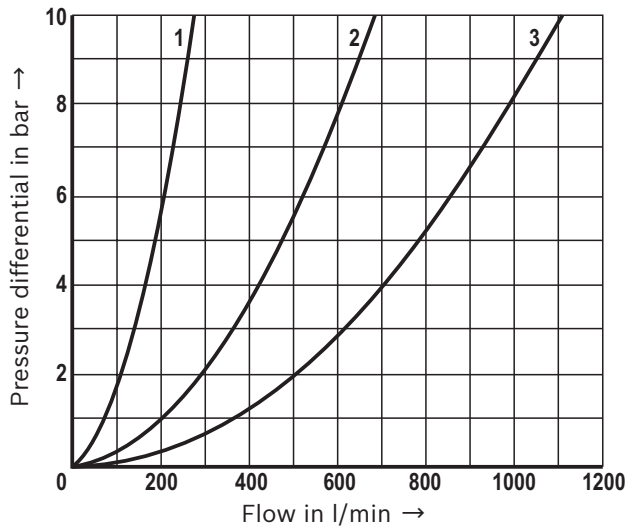


- 1 Size 16
- 2 Size 25
- 3 Size 32
- 4 Size 40
- 5 Size 50
- 6 Size 63
- 7 Size 80
- 8 Size 100
- 9 Size 125

Notice:

The specified characteristic curves were determined without inserted springs, with aligned socket and in channel B with installation geometry optimized according to DIN ISO 7368 (see sketch on page 9).

Characteristic curves for selecting the orifices

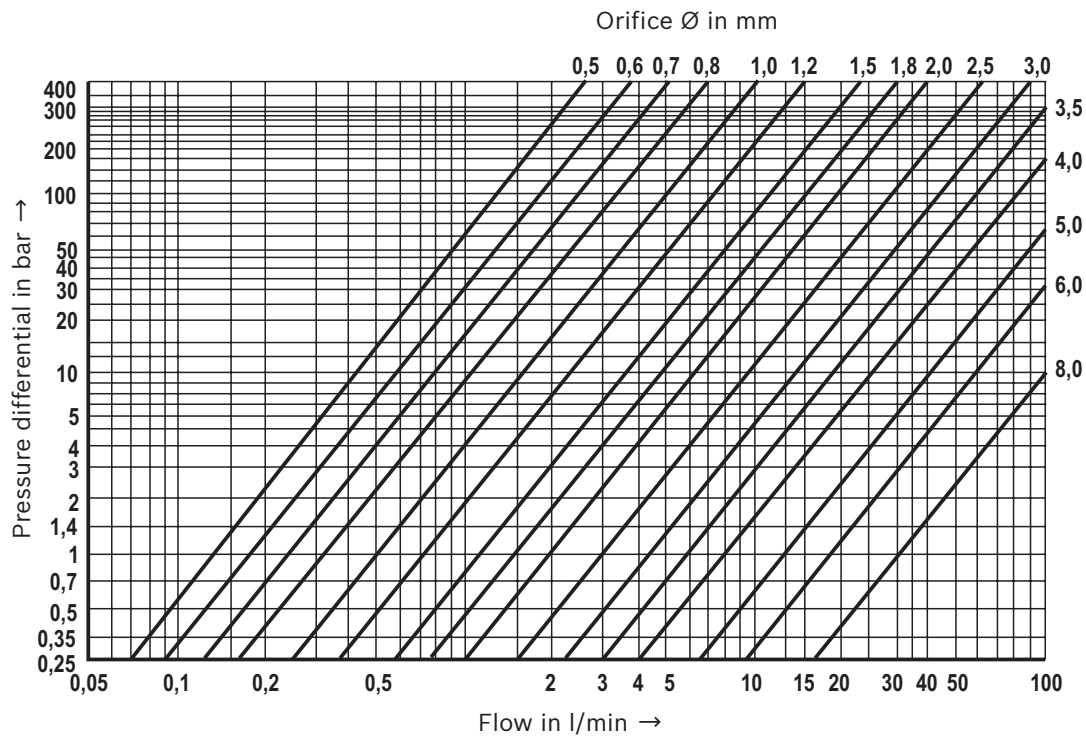

Orifices


Thread	Orifice Ø in mm	Tightening torque M_A in Nm $\pm 10\%$
M6 conical	0.5 ... 3.0	4
M8 x 1 conical	0.5 ... 4.5	14
G1/8	0.5 ... 5.0	16
G1/4	0.5 ... 6.0	44
G1/2	0.8 ... 7.0	65
G3/4	2.0 ... 12.0	80

Plug screws

Thread	Tightening torque M_A in Nm $\pm 10\%$
G1/8	12
G1/4	30
G3/8	55
G1/2	80
G3/4	135
G1	225


Dimensions: NG16 ... 63
(dimensions in mm)

With spool position monitoring (1 position switch "Q7", position monitoring "closed")

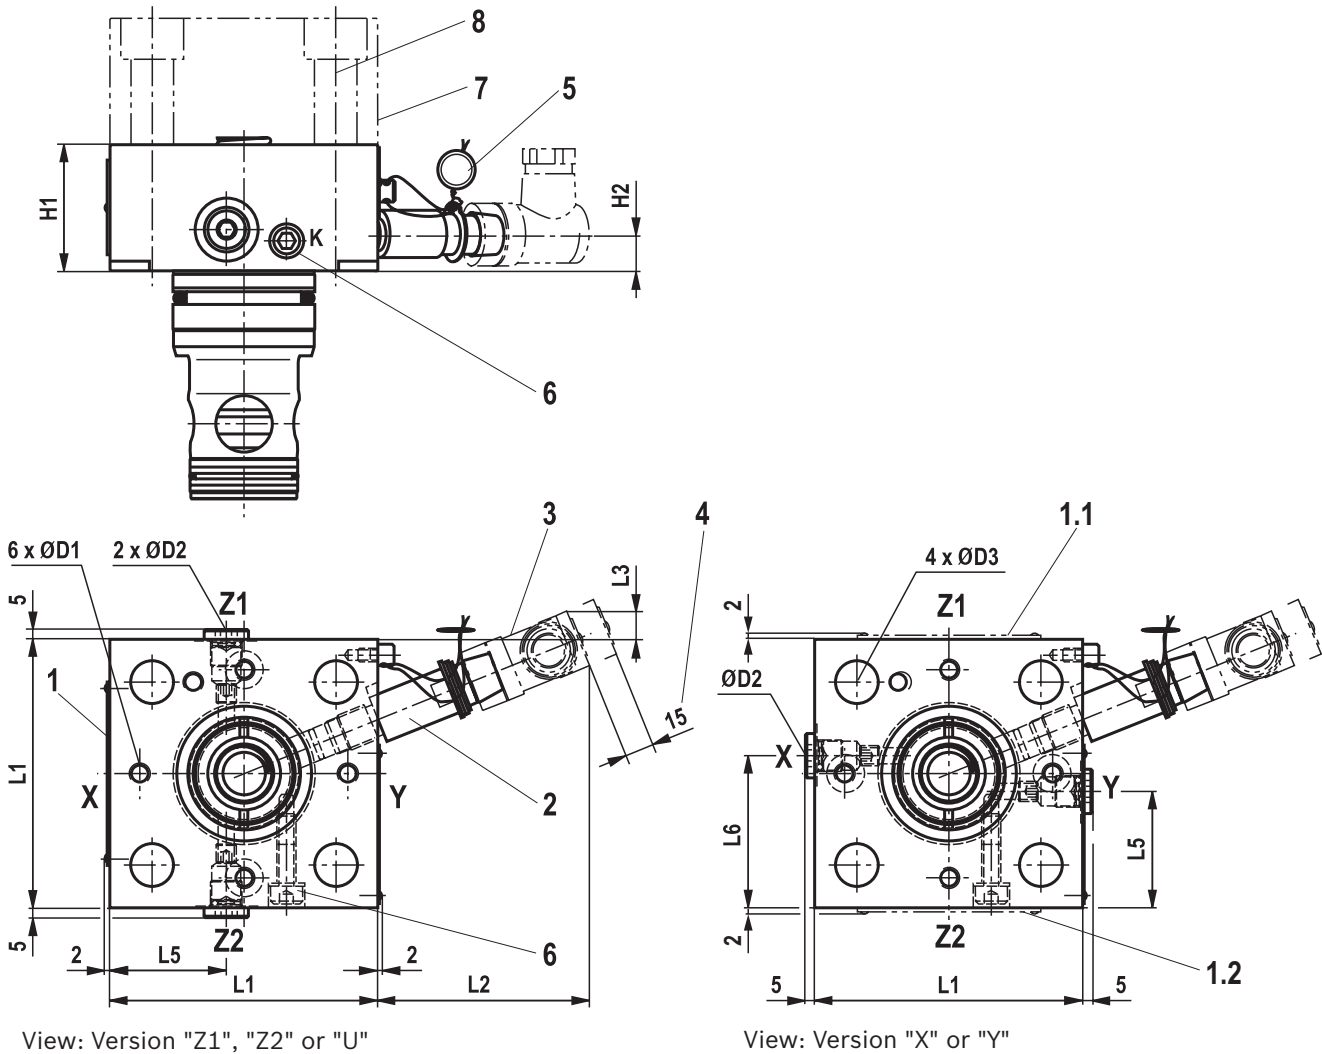


NG	16	25	32	40	50	63
L1	80	85	100	125	140	180
L2	67	67	65	58	58	45
L3	15	9.5	2	–	–	–
L4	7	10	7	–	–	–
L5	34.5	37	45	56	63.5	82.5
L6	45.5	48	55	69	63.5	82.5
H1	40	40	50	80	100	110
H2	11.5	11.5	13.5	29.5	42.5	45.5
ØD1	M6	M6	M8 x 1	G1/8	G1/8	G1/4
ØD2	G1/8	G1/8	G1/8	G1/4	G1/4	G3/8
ØD3	8.5	13.5	19	22	24	26 ⁺¹

Without spool position monitoring (blind plug)

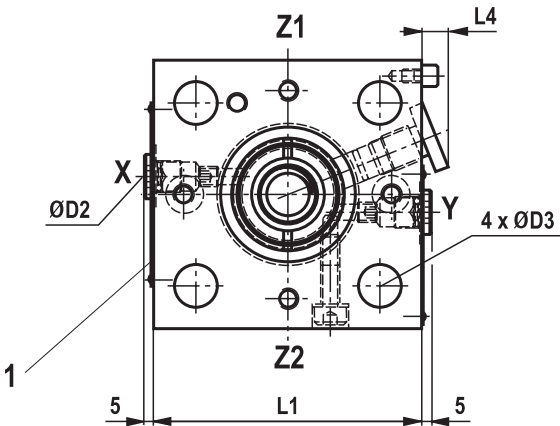

Dimensions: NG16 ... 32
(dimensions in mm)

With spool position monitoring (2 position switches "Q7", position monitoring "closed")

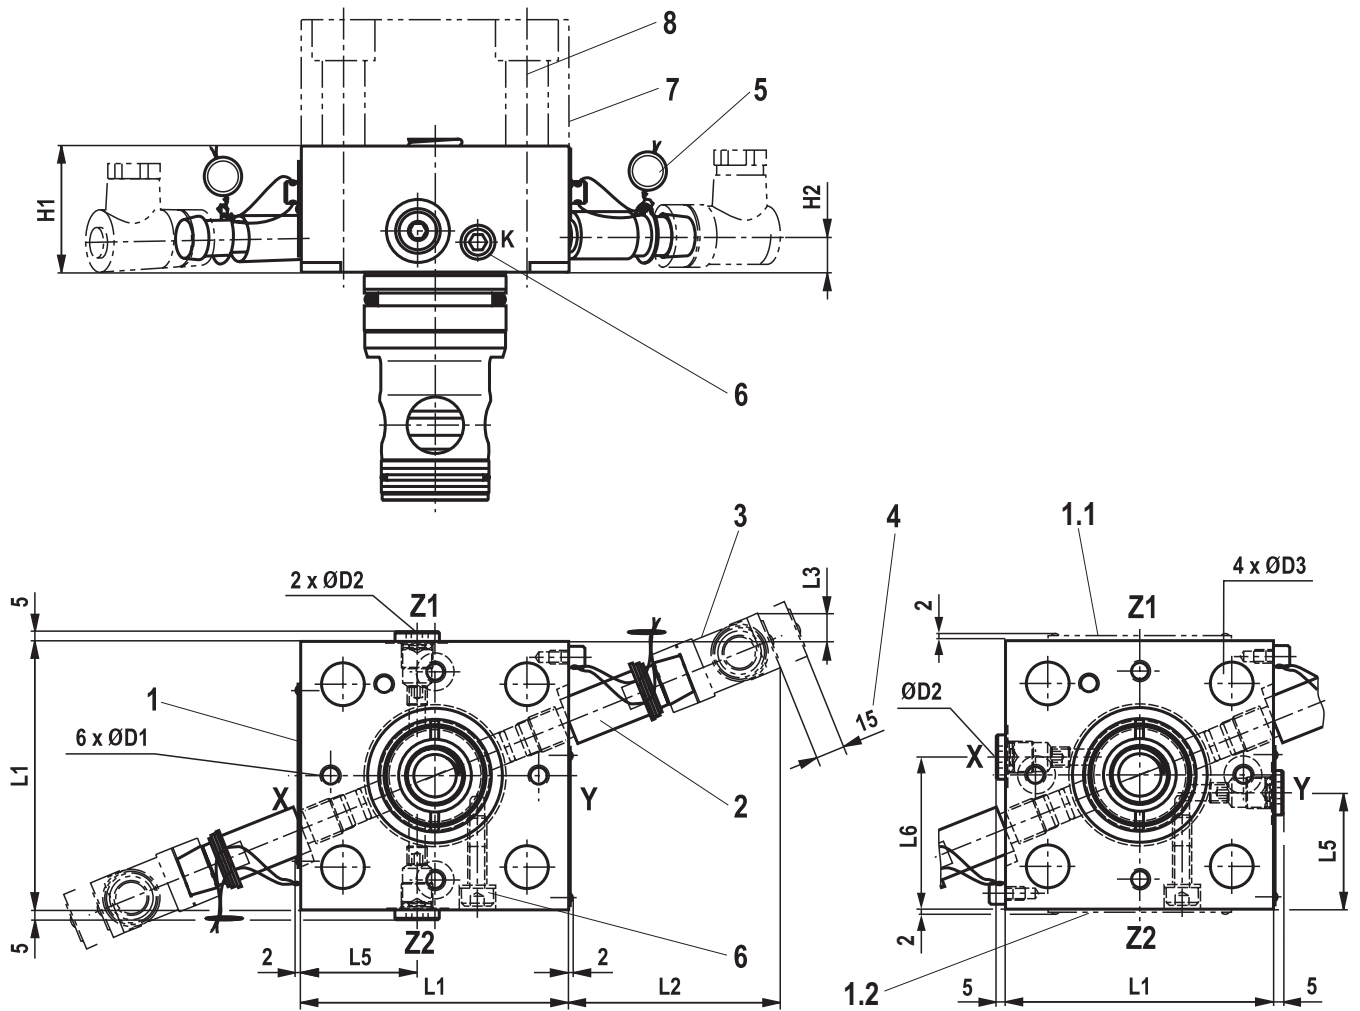

View: Version "Z1", "Z2" or "U"


View: Version "X" or "Y"

NG	16	25	32
L1	80	85	100
L2	67	67	65
L3	15	9.5	2
L5	34.5	37	45
L6	45.5	48	55
H1	40	40	50
H2	11.5	11.5	13.5
ØD1	M6	M6	M8 x 1
ØD2	G1/8	G1/8	G1/8
ØD3	8.5	13.5	19

Item explanations see page 21.

Dimensions: NG40 ... 63
(dimensions in mm)

With spool position monitoring (2 position switches "Q7", position monitoring "closed" and "open")

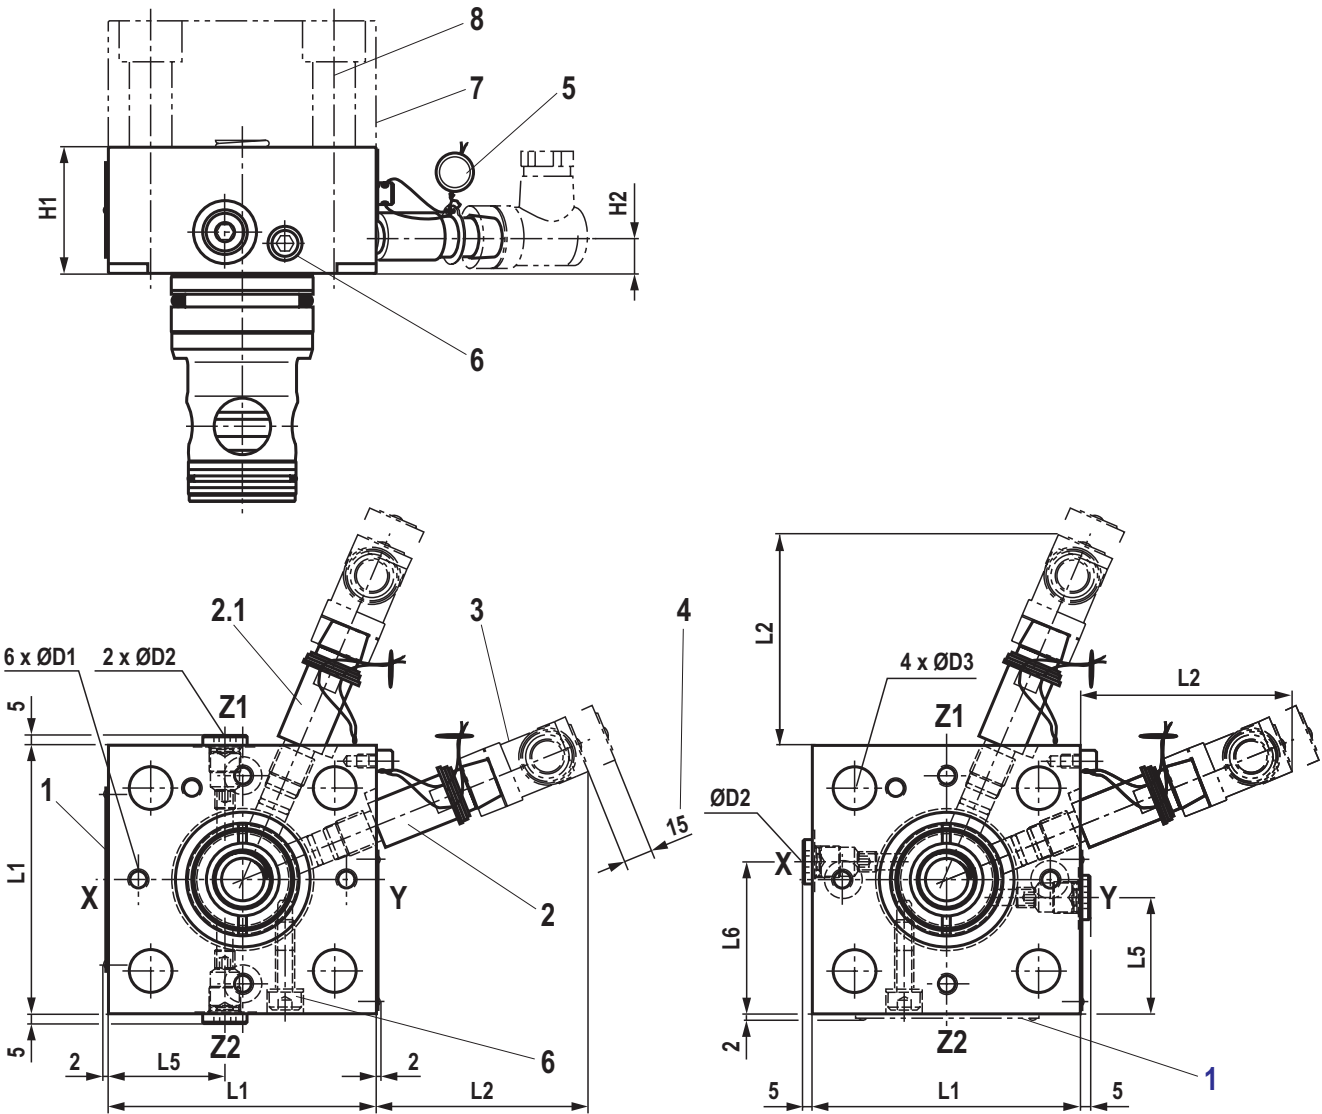

View: Version "Z1", "Z2" or "U"

View: Version "X" or "Y"


NG	40	50	63
L1	125	140	180
L2	58	58	45
L5	56	63.5	82.5
L6	69	63.5	82
H1	80	100	110
H2 ¹⁾	29.5	42.5	45.5
H2 ²⁾	23	35	36
ØD1	G1/8	G1/8	G1/4
ØD2	G1/4	G1/4	G3/8
ØD3	22	24	26 ⁺¹

1) Position monitoring "closed"
2) Position monitoring "open"

Item explanations see page 21.

Dimensions: NG80 ... 125
(dimensions in mm)

With spool position monitoring (1 position switch "Q7", position monitoring "closed")

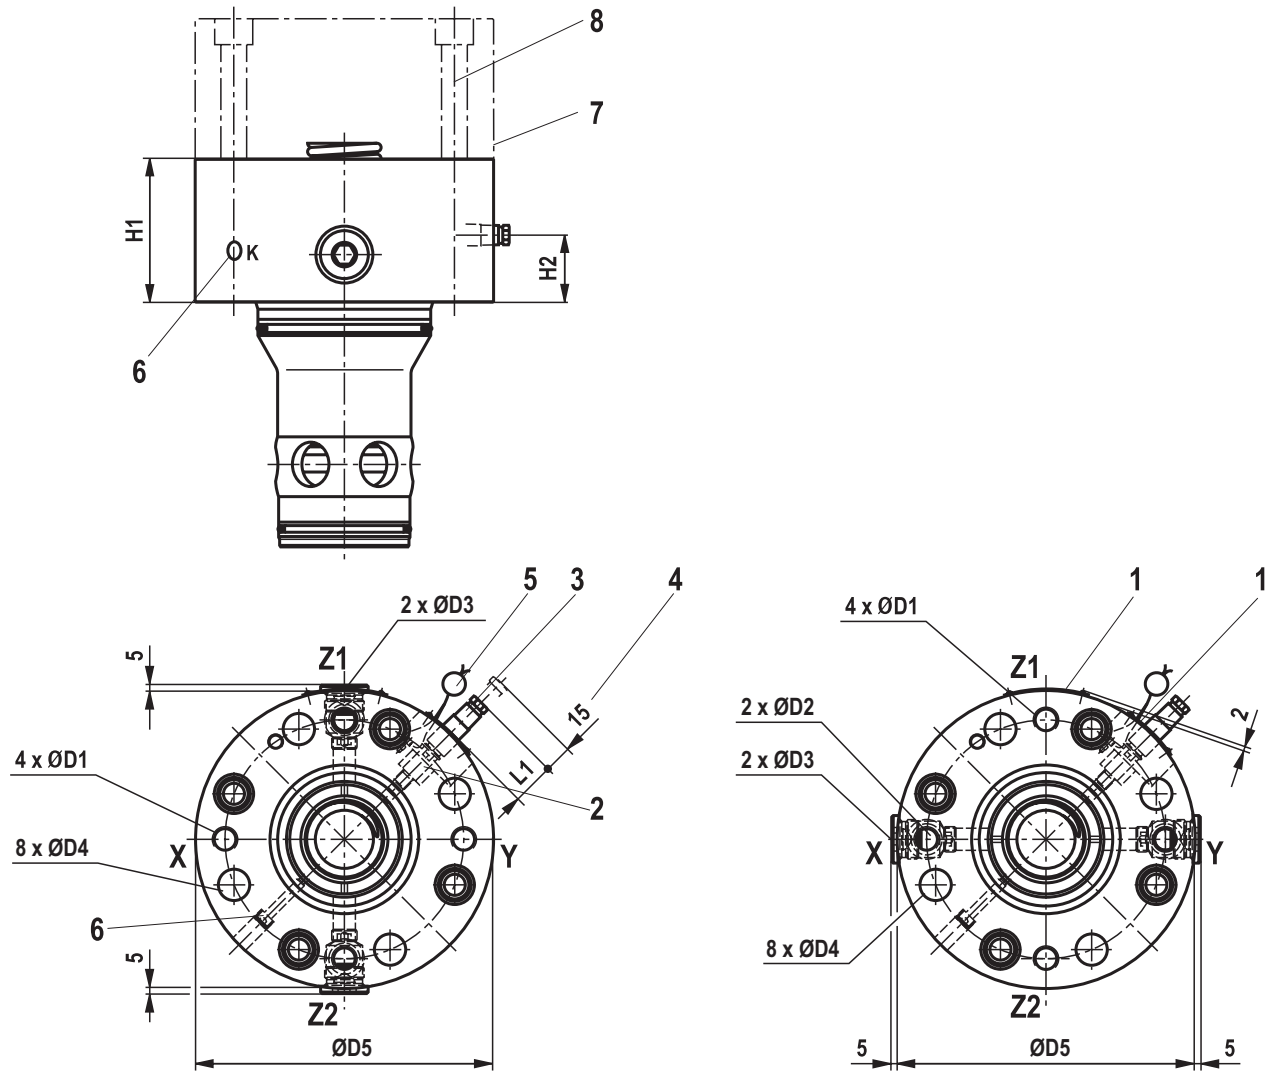

View: Version "Z1", "Z2" or "U"


View: Version "X" or "Y"

NG	80	100	125
ØD1	G1/2	G1/2	G3/4
ØD2	G1/2	G1/2	G1/2
ØD3	G1	G1	G3/4
ØD4	26 ⁺¹	33 ^{+0.5}	40
ØD5	250	300	380
L1	37	26	–
H1	120	140	160
H2	48	55.2	65.2


Item explanations see page 21.

Dimensions: NG80 ... 125
(dimensions in mm)

With spool position monitoring (2 position switches "Q7", position monitoring "closed" and "open")

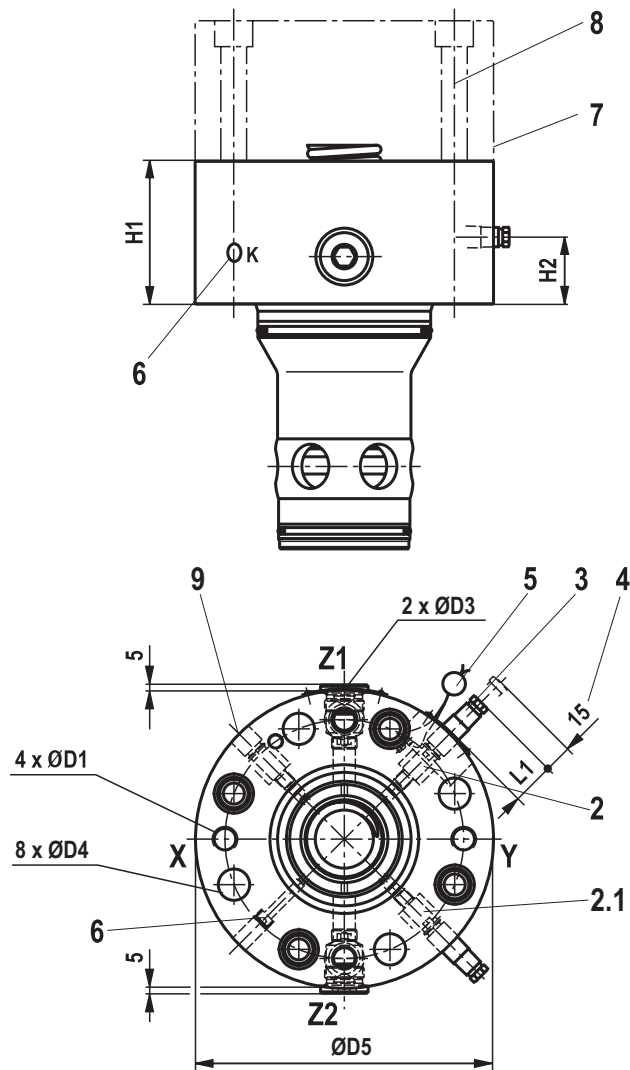

View: Version "Z1" or "Z2"

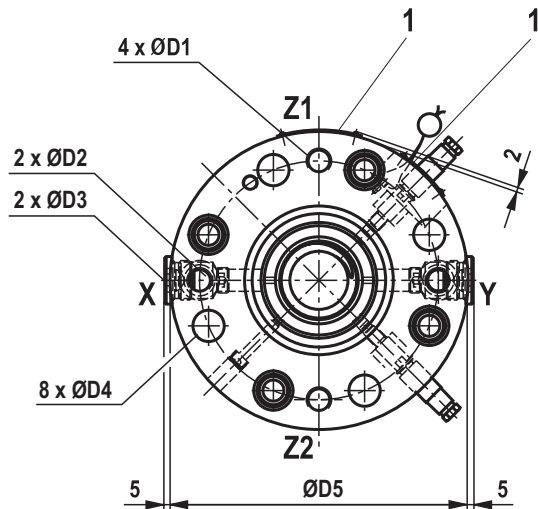

View: Version "X" or "Y"

NG	80	100	125
ØD1	G1/2	G1/2	G3/4
ØD2	G1/2	G1/2	G1/2
ØD3	G1	G1	G3/4
ØD4	26 ⁺¹	33 ^{+0.5}	40
ØD5	250	300	380
L1	37	26	–
H1	120	140	160
H2 ¹⁾	48	55.2	65.2
H2 ²⁾	37.3	44.7	54.5

1) Position monitoring "closed"

2) Position monitoring "open"

Item explanations see page 21.

Dimensions

- 1 Name plate
- 1.1 Name plate NG16 and 25
- 1.2 Name plate NG32 ... 63
- 2 Position switch (optional) or blind plug
- 2.1 Position switch "open" ("Q7T")
- 3 Mating connector (separate order, see page 31)
- 4 Space required for removing the mating connector
- 5 Sealing by the factory
- 6 Transport lock for control spool (marking K).
Don't remove! Loosening or removal and installation only admissible in case of service/repair!
- 7 Standard end/control cover type LFA... (separate order, depends on the basic hydraulic function)
- 8 Valve mounting screws (separate order, see table below)
- 9 Connection possibility for a 3rd position switch "closed" (optional, only NG125)

Valve mounting screws (separate order)

NG	Control cover type LFA	Quantity	Dimension	Material number (preferred)	Tightening torque M_A ²⁾ in Nm ± 10 %
16	WE., GW.	4	M8 x 85	R913004145	30
	WEM.		M8 x 110	R913015792	
	1)		M8 x 80	R913015803	
25	HWM.	4	M12 x 140	R913015593	100
	1)		M12 x 90	R913015617	
32	H1, H2	4	M16 x 130	R913014713	240
	H3, H4		M16 x 120	R913014711	
	HWM.		M16 x 160	R913015647	
	1)		M16 x 110	R913015642	
40	H1, H2, HWM.	4	M20 x 190	R913015680	480
	1)		M20 x 150	R913015676	
50	H2, H4, HWM.	4	M20 x 220	R913014716	480
	1)		M20 x 180	R913014714	
63	H2, H4, HWM.	4	M30 x 260	R913015758	1600
	1)		M30 x 210	R913015754	
80	H2, H4	8	M24 x 240	R913015721	800
	2)		M24 x 220	R913015719	
100	D, WE.	8	M30 x 260	R913015758	1600
	1)		M30 x 280	R913015760	
125	D, WE	8	M36 x 320	R913050473	2300

¹⁾ More available series control covers

²⁾ Calculated with total friction coefficient $\mu = 0.09 \dots 0.14$, adjust in case of modified surfaces




Notice:

The length of the valve mounting screws of the active logics (intermediate cover) must be selected according to the related control cover type LFA....

Screw type, screw length and tightening torque are to be adjusted to the conditions depending on the application. For reasons of stability, exclusively the valve mounting screws listed above may be used.

Installation bore and connection dimensions according to DIN ISO 7368 (dimensions in mm)

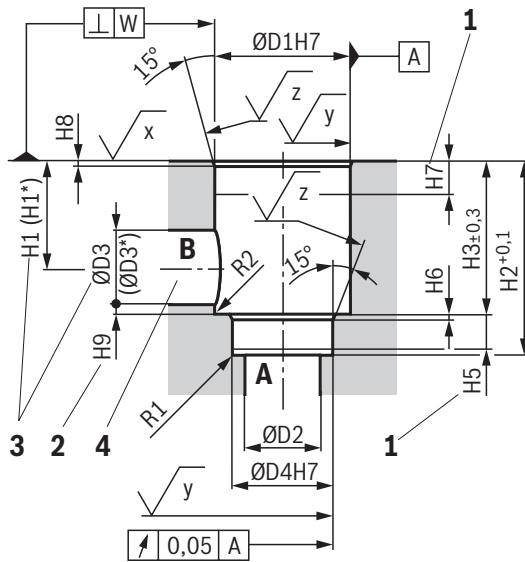


$$\sqrt{x} = \sqrt{Rz1max \ 4}$$


$$\sqrt{y} = \sqrt{Rz1max \ 8}$$

$$\sqrt{z} = \sqrt{0,0025 \cdot / \ Pt \ max \ 16}$$


NG16 ... 63

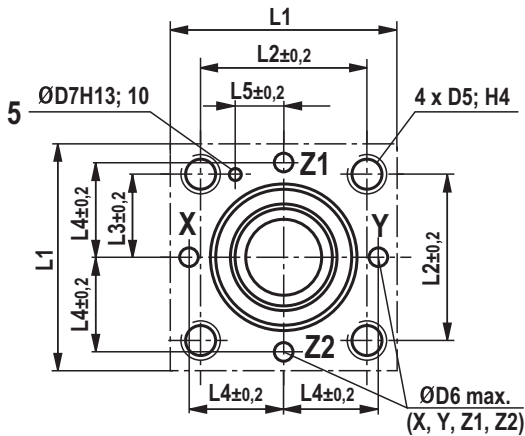

NG80 and 100

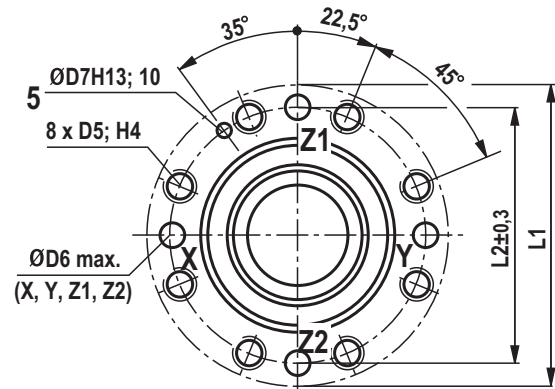

NG125

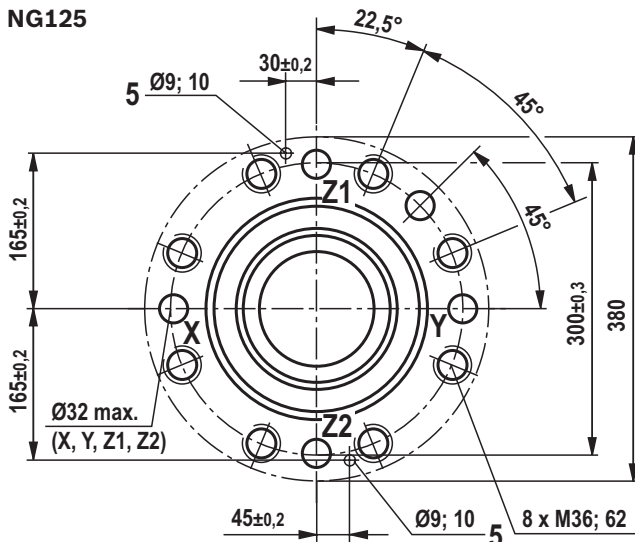

- 1 Depth of fit
- 2 Control dimension
- 3 With a different diameter ØD3 or ØD3*, the distance H1 or H1* has to be adjusted.
- 4 Port B can be positioned around the central axis of port A. However, it must be observed that the mounting bores and the pilot oil bores are not damaged.
- 5 Bore for locking pin

Notes:

- ▶ All information on the mounting bore D5 is based on the use of hexagon socket head cap screws according to ISO 4762.
- ▶ Installation see assembly instructions 21040-MON.

Dimensions see page 23.

Installation bore and connection dimensions according to DIN ISO 7368 (dimensions in mm)

NG	16	25	32	40	50	63	80	100	125
ØD1H7	32	45	60	75	90	120	145	180	225
ØD2	16	25	32	40	50	63	80	100	150
ØD3	16	25	32	40	50	63	80	100	125
ØD3* ¹⁾	25	32	40	50	63	80	100	125	150
ØD4H7	25	34	45	55	68	90	110	135	200
ØD5	M8	M12	M16	M20	M20	M30	M24	M30	–
ØD6	4	6	8	10	10	12	16	20	–
ØD7H13	4	6	6	6	8	8	10	10	–
H1	34	44	52	64	72	95	130	155	192
H1* ¹⁾	29.5	40.5	48	59	65.5	86.5	120	142	180
H2	56 ^{+0.1}	72 ^{+0.1}	85 ^{+0.1}	105 ^{+0.1}	122 ^{+0.1}	155 ^{+0.1}	205 ^{+0.1}	245 ^{+0.1}	300 ^{+0.15}
H3	43 ^{±0.2}	58 ^{±0.2}	70 ^{±0.2}	87 ^{±0.3}	100 ^{±0.3}	130 ^{±0.3}	175 ^{±0.4}	210 ^{±0.4}	257 ^{±0.5}
H4	20	25	35	45	45	65	50	63	–
H5	11	12	13	15	17	20	25	29	31
H6	2	2.5	2.5	3	3	4	5	5	7 ^{±0.5}
H7	20	30	30	30	35	40	40	50	50
H8	2	2.5	2.5	3	4	4	5	5	5.5 ^{±0.2}
H9	0.5	1	1.5	2.5	2.5	3	4.5	4.5	2
L1	80	85	102	125	140	180	250	300	–
L2	46	58	70	85	100	125	200	245	–
L3	23	29	35	42.5	50	62.5	–	–	–
L4	25	33	41	50	58	75	–	–	–
L5	10.5	16	17	23	30	38	–	–	–
W	0.05	0.05	0.1	0.1	0.1	0.1	0.1	0.1	0.1
R1 ²⁾	1	1	1	1	1	1	1	1	1
R2 ²⁾	2	2	2	4	4	4	4	4	4

¹⁾ Dimension ØD3* refers to dimension H1*


²⁾ Maximum dimension

Circuit examples (schematic diagram, function must be checked with the application)



It has to be ensured that pilot oil ports that are not required (blanking plugs) and all pressurized transitions between LFA and LC2A (R-rings) are sealed. This is particularly true for variants marked with *.

Check valve, releasable

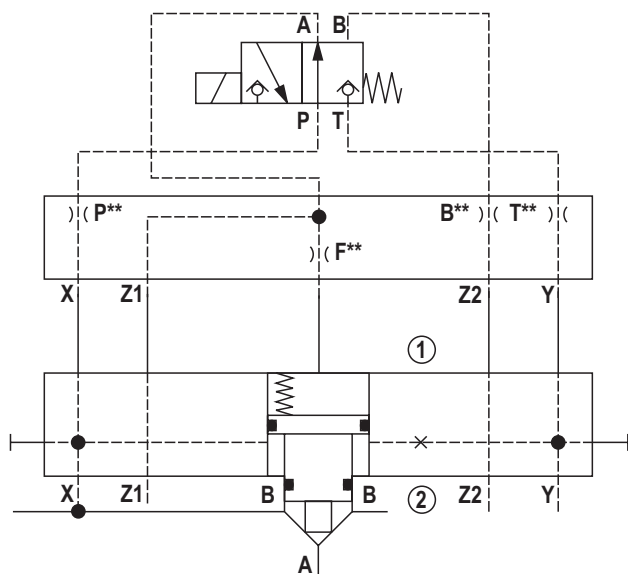


Type M-3SEW 6 U../420..

Type LFA . WEMA...

Type LC2A . A40E-1X/X...


"Pressure-supported closing by excess area" function (e.g. with control cover type "D")

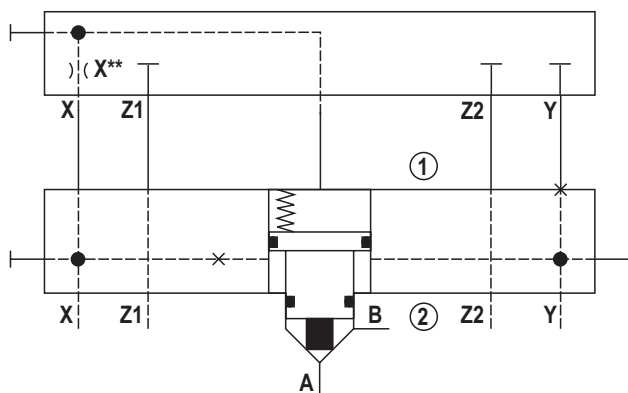

*Type LFA . D...

Type LC2A . A40D-1X/...Y99

"Passive logics with piston seal and spool position monitoring" function (Closing with spring force without excess area; here with control cover type "D"); ideal for the retrofitting of existing circuits

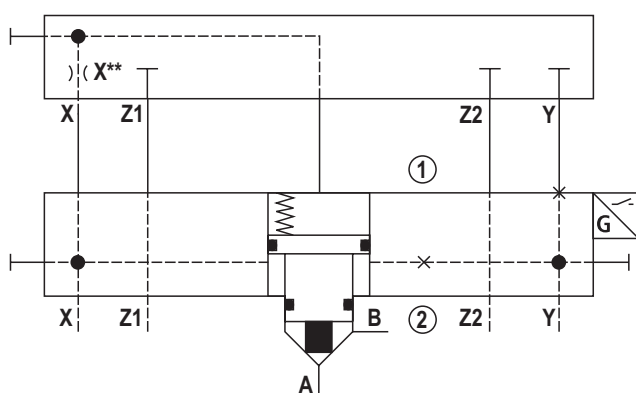


*Type LFA . D...

Type LC2A . A40D-1X/XQ7... Y99

Circuit examples (schematic diagram, function must be checked with the application)

"Passive logics with spool sealing" function, spool position monitoring and stroke limitation

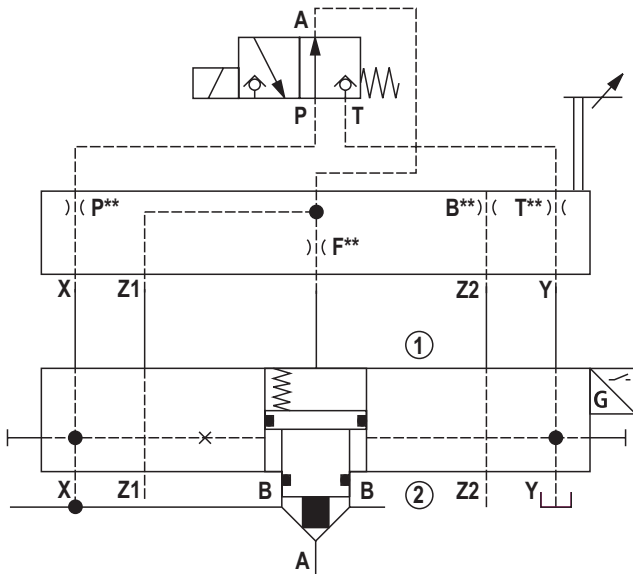

Type M-3SEW . U../420..


Type LFA . HWMA...

Type LC2A . A40D-1X/YQ7...

Advantages:

- ▶ Retrofitting for existing installation using the existing control cover type LFA and pilot control valves
- ▶ Leakage-free locking
- ▶ Position monitoring
- ▶ Shortened closing time

"Closed basic position" function; safe locking, increased closing force

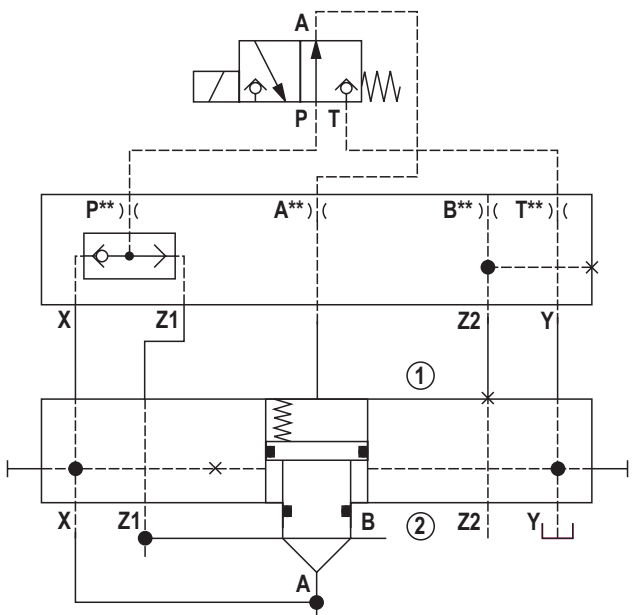


Type M-3SEW 6 U../420..

Type LFA . GWMA...

Type LC2A . D40E-1X/Y... (W99)

Advantages:

- ▶ "Safe locking" in both directions
- ▶ Control spool cannot be controlled open from side B (version "...D.E...")
- ▶ Position switch retrofittable
- ▶ Shortened switching time

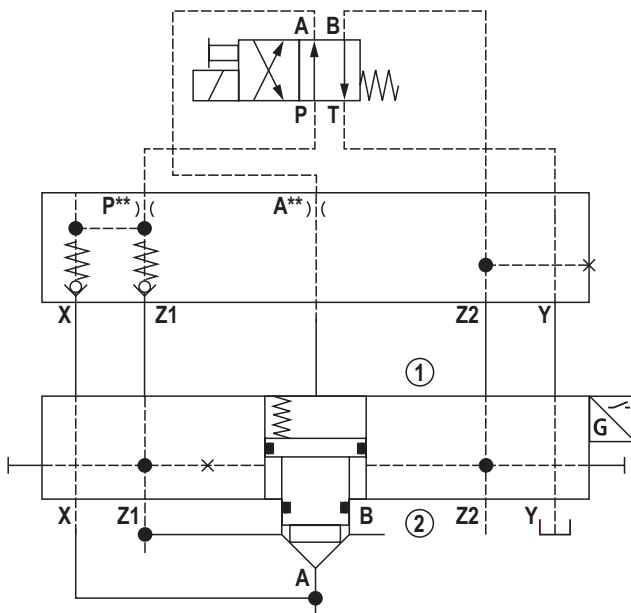Circuit examples (schematic diagram, function must be checked with the application)**"Separation between both pilot pressures and hydraulic keeping open in case of pilot pressure failure" function**


Type M-4SEW . D../420..

Type LFA . GWMA20...

Type LC2A . B40F-1X/Z2Q7...

**Advantages:**

- ▶ Leakage-free separation of the two pilot pressures "X" and "Z1"
- ▶ Function of a hydraulic detent ("Keeping open", also in case of pilot pressure failure)
- ▶ Permits complete pressure compensation of both main ports

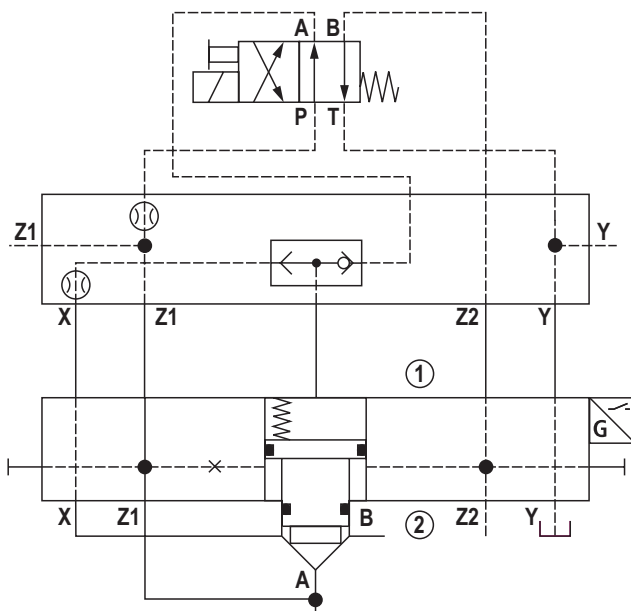"Check valve" and "Safe locking" function; increased closing force

Type M-4SEW . D../420..

Type LFA . KWMA...


Type LC2A . B40F-1X/Z2Q7...

**Advantages:**

- ▶ Leakage-free locking
- ▶ Increased closing force (shortened closing time)

Circuit examples (schematic diagram, function must be checked with the application)

"Check valve" (releasable) and "Safe locking" function; "Keeping open" additional function

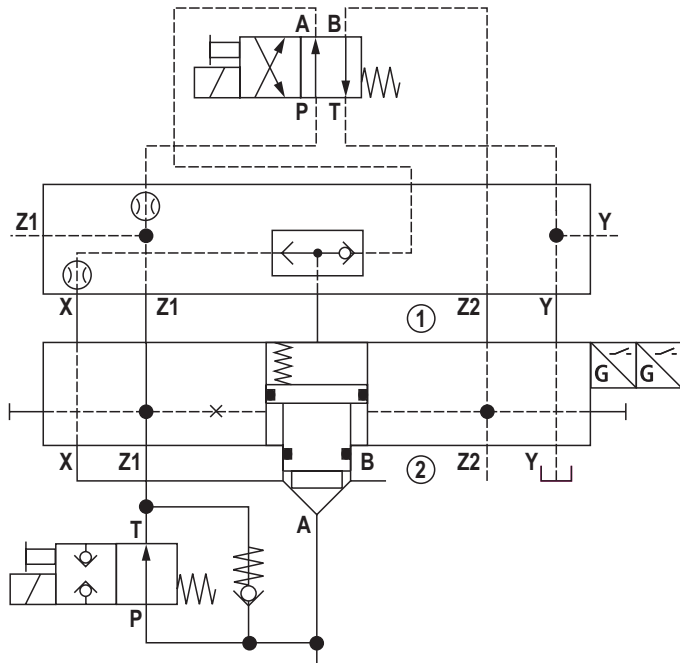

Type M-4SEW . D../420..

Type LFA . KWMA...


Type LC2A . B40F-1X/Z2Q7Q7T...



Advantages:

- ▶ "Safe locking" in both directions
- ▶ Check valve function that can be switched off
- ▶ Leakage-free locking
- ▶ Monitoring of the open and closed position

"Check valve circuit" function, self-locking, fast-closing

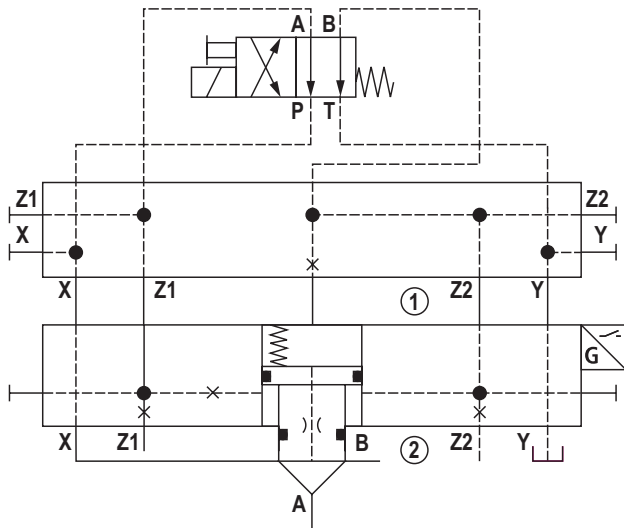

Type M-4SEW . D../420..

Type LFA 40 WEMB...F99

Type LC2A 040 D40E-1X/Z2Q9G24A160D99S99F



Advantages:

- ▶ Maximum load pressure in channel A 500 bar (condition: maximum pressure in channel B 250 bar)
- ▶ Very fast closing by internal spring chamber filling (e.g. NG63 < 20 ms)
- ▶ High locking force
- ▶ Analog position sensing (optional)

Inductive position switch type Q7: Electrical connection

The electrical connection is realized via a 4-pole mating connector with connection thread M12 x 1 (separate order, see page 31). The inductive position switch can be connected as normally closed or normally open contact.

Features:

- Adjustment-free assembly due to fixed stop
- Certification according to CE and cULus

Connection voltage:	12 ... 30 V, direct voltage
Admissible residual ripple:	< 15%
Load capacity:	200 mA; short-circuit-proof
Tightening torque M_A:	10^{+5} Nm
Switching outputs:	PNP transistor outputs, load between switching outputs and GND
Pinout:	1 $+U_B$ 2 Normally closed contact 3 L0 4 Normally open contact




Notes:

- The "closed" spool position is adjusted to and optimized for a condition at operating temperature. Considerably deviating operating temperatures thus influence the absolute switching position as well as its hysteresis.
- The position switch type Q7 has no connection for protective earthing conductors!
- Assembly tool for position switch type Q7 or blind plug upon request.
- **BG certificate** (only size 16 ... 100 and valve poppet version "D" and "F"):
The respectively valid "MHHW 10014" certificate for using the active logics type LC2A with position switch type Q7 in hydraulic security locks in injection molding machines according to the manufacturer's installation instructions is available upon request.

Inductive position switch type Q8: Electrical connection

The electric connection is realized via a 4-pole mating connector (separate order, see page 31) with connection thread M12 x 1.



- Features:**
- Certification according to CE
 - Explosion protection according to Ex II 2G Ex ia IIC T6

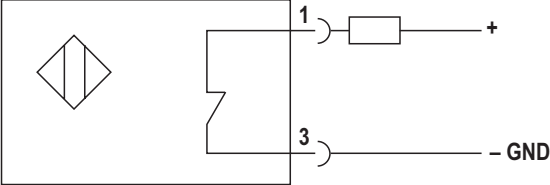Connection voltage:	8.2 V +9%/-6%, direct voltage
Maximum current consumption, dampened:	1 mA
Maximum current consumption, not damped:	4 mA
Tightening torque M_A :	10 ⁺⁵ Nm
Switching outputs:	NAMUR evaluation electronics necessary
	
Pinout:	 1 2 3 4 1 2 3 4 Current source - 0 V, GND -


Inductive position switch type Q9: Electrical connection

The electrical connection is realized via a 4-pole mating connector with connection thread M12 x 1 (separate order, see page 31).

- Features:**
- Certification according to CE

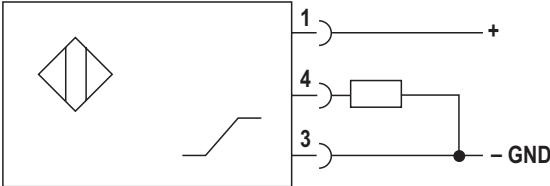
Connection voltage:	15 ... 30 V, direct voltage
Admissible residual ripple:	< 15%
Load capacity:	200 mA; short-circuit-proof
Tightening torque M_A :	10 ⁺⁵ Nm
Switching outputs:	PNP transistor outputs, load between switching outputs and GND
	
Pinout:	 1 2 3 4 1 2 3 4 +U_B - L0 0 ... 10 V DC

Switching point behavior and overlap: Valve poppet with damping nose "D" or overlap nose "F" and position overlap "closed"

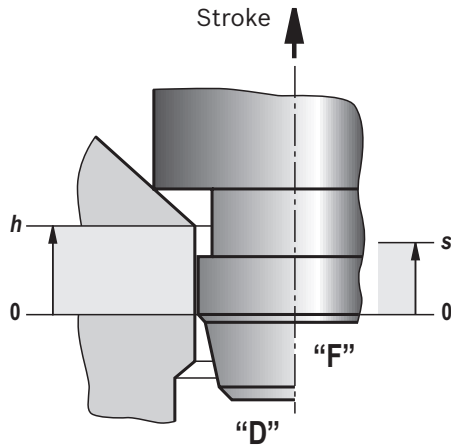

- h** Overlap stroke (mechanical)
- s** Switching point window (electrical)
- q_{v0}** Maximum flow until **h_{min}**


Characteristic curve position switch type Q7

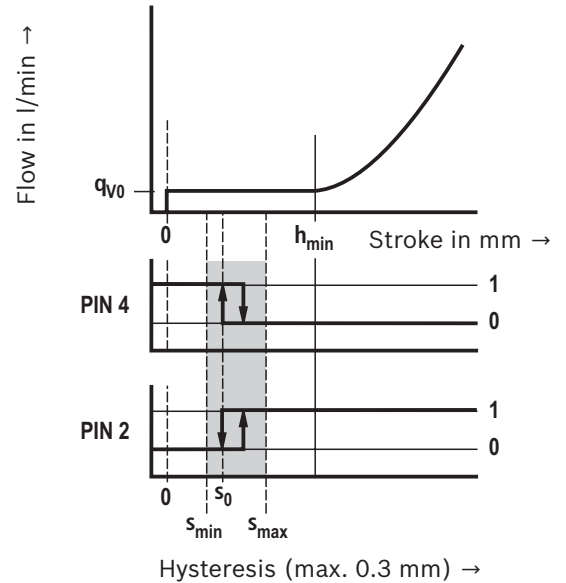

Mating connectors for inductive position switch (dimensions in mm)

Mating connector suitable for K24 4-pole, M12 x 1 with screw connection, cable gland Pg 9.


Material no. **R900031155**

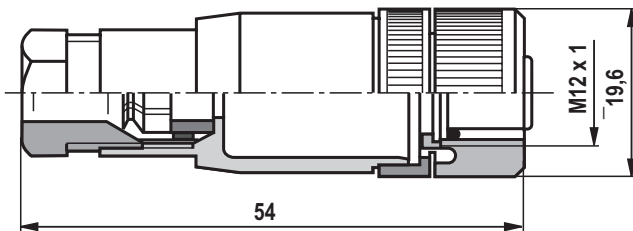

Mating connector suitable for K24 4-pole (only up to NG80), M12 x 1 with screw connection, cable gland Pg 9, angled.

Housing can be rotated by 4 x 90° in relation to the contact insert.

Material no. **R900082899**

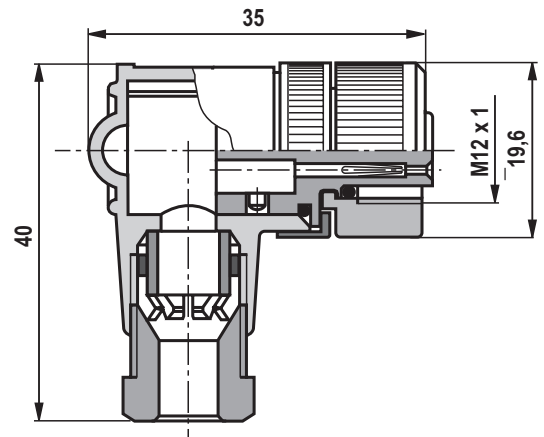

Notice:

With pre-assembled mating connectors, the alignment of the cable outlet may vary depending on the installation position of the sensor and cause assembly problems!

For further information refer to data sheet 08006.

Further information

► 2-way cartridge valves, directional functions (passive logics)	Data sheet 21010
► 2-way cartridge valves, pressure function (passive logics)	Data sheet 21050
► Hydraulic fluids on mineral oil basis	Data sheet 90220
► Environmentally compatible hydraulic fluids	Data sheet 90221
► Flame-resistant, water-free hydraulic fluids	Data sheet 90222
► Flame-resistant hydraulic fluids - containing water (HFAE, HFAS, HFB, HFC)	Data sheet 90223
► Reliability characteristics according to EN ISO 13849	Data sheet 08012
► Hydraulic valves for industrial applications	Data sheet 07600-B
► 2-way cartridge valve, actively controllable	Assembly instructions 21040-MON
► Selection of the filters	www.boschrexroth.com/filter
► Information on available spare parts	www.boschrexroth.com/spc